


54/74 FAMILIES OF COMPATIBLE TTL CIRCUITS

PIN ASSIGNMENTS (TOP VIEWS)

2048-BIT READ-ONLY MEMORIES

270 OPEN-COLLECTOR OUTPUTS
512 4-BIT WORDS




For more information contact the factory

SN54270 (J) SN74270 (J, N)

2048-BIT READ-ONLY MEMORIES

271 OPEN-COLLECTOR OUTPUTS
256 8-BIT WORDS

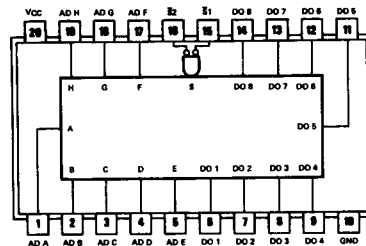


For more information contact the factory

SN54271 (J) SN74271 (J, N)

OCTAL D-TYPE FLIP-FLOPS

273 COMMON CLOCK
SINGLE-RAIL OUTPUTS

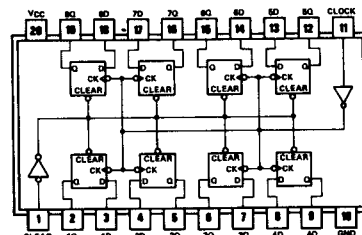


See page 7-388

SN54273 (J) SN74273 (J, N)
SN541273 (L) SN741273 (J, N)

4-BIT BY 4-BIT BINARY MULTIPLIERS

274 3-STATE OUTPUTS
8-BIT PRODUCTS
SUB-MULTIPLE PRODUCTS

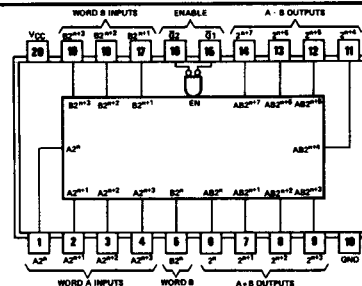

See page 7-391

SN54274 (J) SN74274 (J, N)

5